



Marking to ATEX 94/9/EC Directive: II 2 G Ex d IIC Gb / II 2 G Ex e IIC Gb / II 2 D Ex tb IIIC Db

Zone: 1, 2, 21, 22 , Gas Group IIC


Compliance with: IEC 60079-0:2011, IEC 60079-1:2007, IEC 60079-7:2007, IEC 60079-31:2008

EC Type Examination Certificate: ISSeP 12 ATEX 025U



FEATURES

- NMC Couplings are mainly used in electrical conduit installations for connection of thread ended pipes.
- Sizes and threads available are M20 to M100 ISO metric thread or 1/2" to 4" NPT. Other threads upon request.
- Manufactured as standard in brass. Alternative materials and plating are available upon request.
- Available in round or hexagonal with similar or dissimilar size and thread forms at each end.

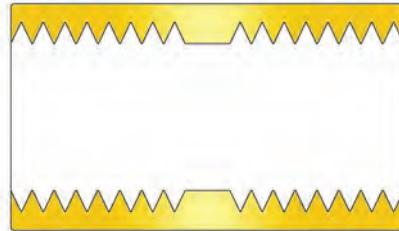

ORDERING INFORMATION

Specify size, material and plating (if required), round or hexagonal.

Example: 3/4" Brass nickel plated, round coupling.

نور محور فارس
تولید کننده تجهیزات الکتریکی ضد انفجار

NM SWITCHGEAR

Explosion Proof Electrical Supplies

