



Marking to ATEX 94/9/EC Directive: Ex II 2 G Ex d IIC Gb / II 2 G Ex e IIC Gb / II 2 D Ex tb IIIC Db

Zone: 1, 2, 21, 22 , Gas Group IIC


Compliance with: IEC 60079-0:2011, IEC 60079-1:2007, IEC 60079-7:2007, IEC 60079-31:2008

EC Type Examination Certificate: ISSeP 12 ATEX 025U



FEATURES

- Stopping plugs are for closing unused cable entries on enclosures to maintain explosion proof and ingress protection integrity of the equipment.
- Threads available are ISO 965.1 metric, NPT inch, PG ...
- Manufactured as standard in brass. Alternative materials and plating are available upon request.
- Hexagon key A/F size: M20 & M25 : 8 , M32, M40 & M50 : 12 , M63, M75, M80, M90 & M100: 16

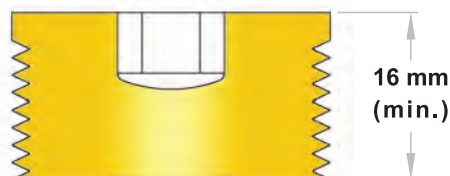

ORDERING INFORMATION

Specify size, material and plating (if required).

Example: M20 brass, nickel plated stopping plug.

