



Marking to ATEX 94/9/EC Directive: Ex II 2 G Ex d IIC T4 / II 2 D Ex tD A21 IP65 T130°C

Zone: 1, 2, 21, 22 , Gas Group IIC

Compliance with: IEC 60079-0:2004, IEC 60079-1:2003, IEC 61241-0:2004, IEC 61241-1:2004

EC Type Examination Certificate: ISSeP 07 ATEX 022



FEATURES

Application:	Supplied with hook to be easily carried and hanged on the working site.
Enclosure:	Copper free aluminium alloy suitable for petroleum and marine locations.
Glass:	Borosilicate tempered glass resistant to impact and sudden heat changes.
Lamp holder:	E27 for use with incandescent or long life low power consumption lamps.
Voltage transformer:	Available as optional in separate enclosure for operating voltages other than 220 VAC.
IP rating:	IP65 to IEC 529 / EN 60529. IP66 by application of an approved non-hardening grease.
Wire guard:	Stainless steel wire guard supplied with all lighting fixtures as standard.
Cable entry:	Standard M6 internal and external earth screws.
Earthing:	ISO 965.1 metric as standard. NPT or other threads on request.
Finish:	Electrostatic powder coated or two pack epoxy paint.



TRANSFORMER
ENCLOSURE

OPTIONS

- Voltage transformer. Please specify required voltage.
- NPT or other threads cable entry.
- Enameled aluminium reflector.
- Cable gland
- Lamp

نور محور فارس
تولید کننده تجهیزات الکتریکی ضد انفجار
NM SWITCHGEAR
Explosion Proof Electrical Supplies





NMLP Portable Hand Lamp and Transformer



TYPE	WATT	TEMP CLASS	LAMP HOLDER	H mm	W mm	Weight kg.
NMLP	up to 100	T4	E27	280	200	2.5

All dimensions are in mm.
Dimensions shown are within manufacturing tolerances

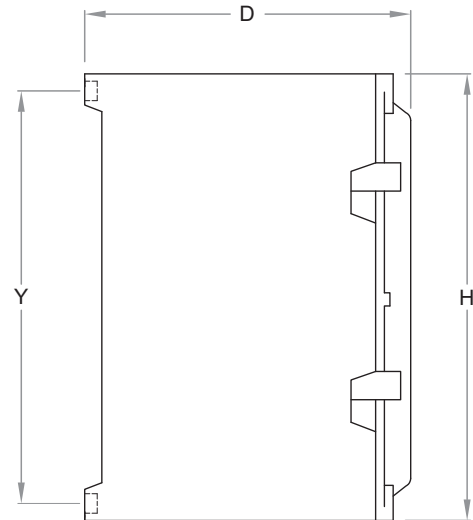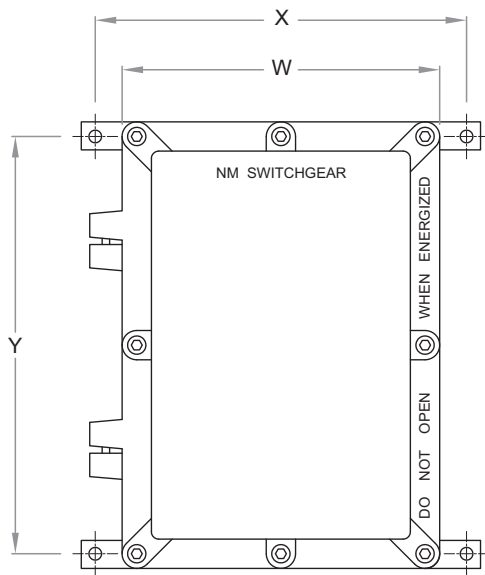

Transformer enclosure.

TYPE	VA rating	TEMP CLASS	W mm	H mm	D mm	Mounting Detail		Weight kg.
						X	Y	
EJBCS1	100	T5	181	256	184	210	230	7.1

All dimensions are in mm.
Dimensions shown are within manufacturing tolerances